



XCT60_Y 汽车起重机 / Truck Crane

技术规格书


Technical specifications



60t



44m





59.8m



目录
Contents

目录 Contents	
尺寸参数 Dimensions	3
技术规格 Technical specifications	4-9
重量/作业速度 Weight / Working speeds	10
臂架组合方案 Boom / Jib combinations	11
主臂 Boom	12-14
副臂 Jib	15-16
符号标识 Description of symbols	17
注意事项 Notes	18
主要技术参数表 Table of main technical parameters	19-20

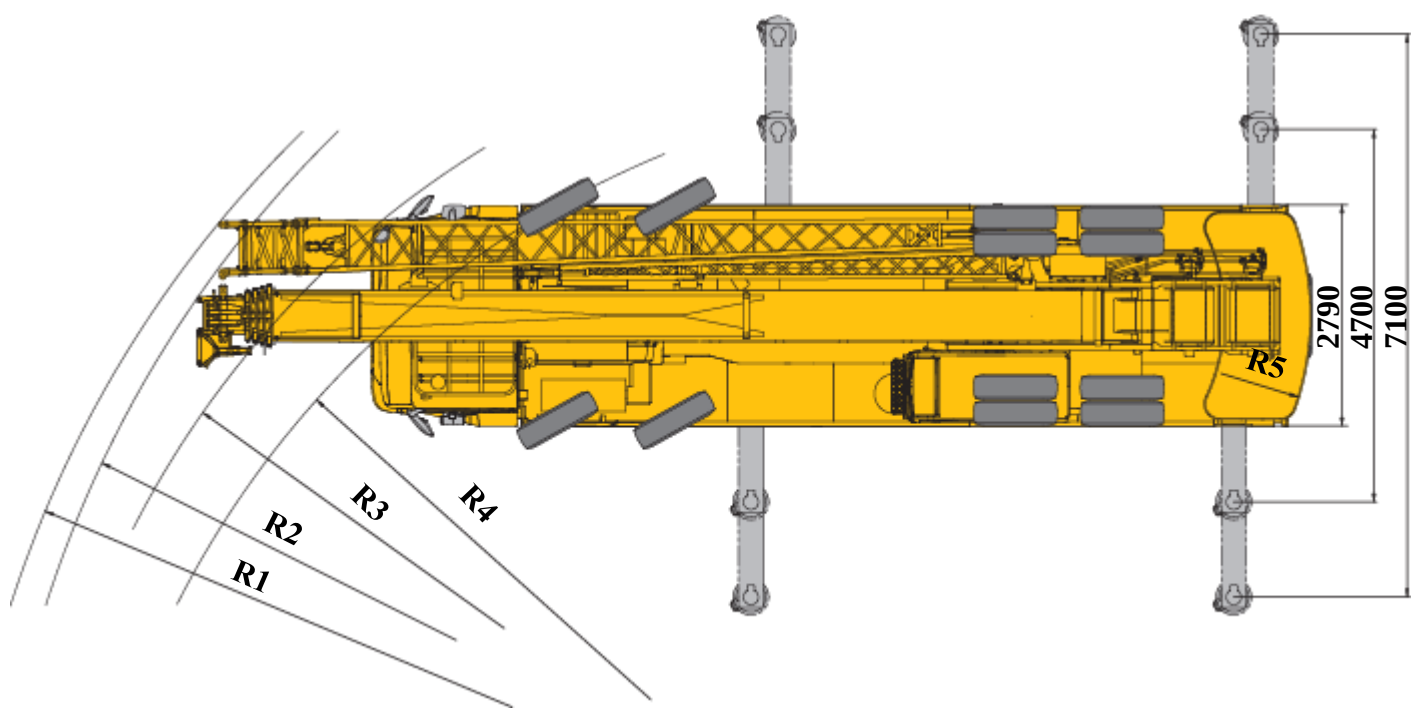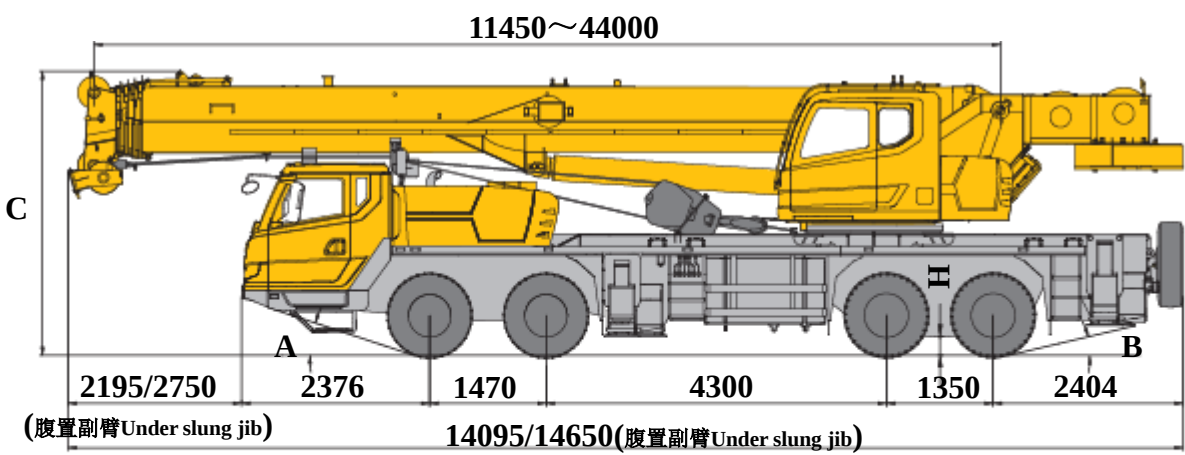尺寸参数
Dimensions



	副臂型式 Jib	A	B	C	H	R1	R2	R3	R4	R5
315/80 R22.5	侧置/腹置 Swing-away/Under slung	19°	13°	3615/ 4050	260	15100/ ——	14780/ 15170	13600	12000	3900
12.00/R24(仅用于 新加坡机型Only for the Singapore model)	侧置/腹置 Swing-away/Under slung	21°	15°	3685/ 4120	330	15100/ ——	14780/ 15170	13600	12000	3900

技术规格

Technical specifications



底盘	配置
车架	徐工设计、制造，全覆盖式走台板，防扭转箱型结构，高强度钢材制造。
支腿	4支腿。纵向H形布置，操作杆控制液压动作。可由底盘任意一侧同时或单独控制各支腿的动作，设有水平仪。带第五支腿，支腿油缸均设有单向阀，且垂直支腿带有双向液压锁。 支脚盘尺寸：φ450mm 最大起重量时支腿反力：504KN
发动机	中国重型汽车集团，直列、水冷、四冲程、增压中冷、高压共轨；WD615.334，额定功率247kW/2200rpm，最大扭矩1350Nm/(1100-1600)rpm，国三排放标准。 燃油箱容积：300L。
	东风康明斯，直列、水冷、四冲程、增压中冷、高压共轨；QSL8.9-C325-30，额定功率242kW/2100rpm，最大扭矩1385Nm/1500rpm，Stage III 排放标准。 燃油箱容积：300L。
	潍柴动力，直列、水冷、四冲程、增压中冷、高压共轨；WP10H375E62，额定功率275kW/1900rpm，最大扭矩1800Nm/(1000-1400)rpm，欧VI排放标准。 燃油箱容积：300L。
	潍柴动力，直列、水冷、四冲程、增压中冷、高压共轨；WP9H336E62，额定功率247kW/1900rpm，最大扭矩1600Nm/(1000-1400)rpm，BS-IV排放标准。 燃油箱容积：320L。

变速箱	采用陕齿机械式变速箱，手动远距离软轴操纵，全同步器；9个前进档，1个倒档，工作稳定、可靠。	●
	采用陕齿机械式变速箱，手动远距离软轴操纵，全同步器；10个前进档，2个倒档，工作稳定、可靠。	○新加坡机型
车桥	高强度桥，引进国外先进技术，名牌厂家制造，性能可靠。	●
悬挂	后悬挂系统，采用V型推力杆结构，橡胶悬架，增加底盘行驶稳定性，减少轮胎的磨损。	●
轮胎	315/80R22.5-22PR，无内胎轮胎，重量轻，散热好，行驶噪音低，承载力强，使用寿命长。	●
	12.00/R24轮胎，重量轻，散热好，行驶噪音低，承载力强，使用寿命长。	○新加坡机型
制动	行车制动：脚踏板操纵的双回路气压制动。第一回路作用于一、二轴车轮上，第二回路作用于三、四轴车轮上。 驻车制动：弹簧贮能制动，作用于二、三、四轴车轮上； 辅助制动：发动机缸内制动、排气制动，安全可靠，延长制动摩擦片使用寿命。	●
转向	机械式转向机构，带有液压助力。	●
驾驶室	右驾豪华驾驶室。配备电动升降器的安全玻璃、可调式座椅、简易卧铺、电动调节后视镜、可调节高度及角度方向盘、液晶显示器和收放机等。 标配冷暖空调。	●

技术规格

Technical specifications

电气系统	直流24伏特，串联 12 伏特的电池组 2 个。	●
	发电机：28±0.3 伏特，70 安培（或80A）。	
安全装置	液压双向锁	●
	旋转报警灯	○
	黄色反光标识	○
	倒车影像	○
	ABS	○

	上车	配置
结构	徐工设计、制造，高强度钢材制造。	●
液压系统	专用节流装置匹配阀后补偿负载敏感设计，系统最低流量更稳定，系统刚度更合理，作业微动性、平顺性更突出；采用分合流技术，起升、变幅、伸缩双泵合流；风冷式液压油散热器； 液压油箱容积：600L	●
操纵方式	机械操纵。	●
	先导液比例操纵，由左右2个操纵手柄控制。无级调速。	机械机型 ● 先导机型
主起升机构	液压控制调速，装有双折线绳槽卷筒，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。 具有轻载高速、重载低速的特点。	●
副起升机构	液压控制调速，装有双折线绳槽卷筒，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。 具有轻载高速、重载低速的特点。	●
回转机构	四点接触球式回转支承，由液压马达通过行星齿轮回转机构驱动，可连续回转360°；具有动力控制或自由回转的功能，可无级调速。	●
变幅机构	单支双作用前置液压变幅油缸，带有平衡阀。	●
吊钩	60t吊钩	●
	35t吊钩	○
	4.5t吊钩	●
平衡重	总重8t，有8t，6.5t和5.5t三种组合	●

技术规格

Technical specifications

操纵室	新型钢制操纵室，装有安全玻璃，车窗装有遮阳帘，外开式车门，座椅靠背可倾斜定位。前窗顶窗装有雨刮器，标准的操纵控制件和指示器。配备单冷空调。	●
	操纵杆加长节	○
安全装置	液压平衡阀；液压溢流阀；力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；自由滑转；回转锁止	●
	卷扬监视装置	○
	三色报警灯	○
	回转警示灯	○
	角度指示器	○
	黄色反光标识	○

 臂架系统		配置
主臂	由1节基本臂和4节伸缩臂组成，采用抗扭曲设计，高强度结构钢制造。双缸绳排伸缩机构。 主臂长度：11.5m～44m。	●
侧置副臂	2节桁架式焊接结构，具有0°、15°、30°三种固定副臂安装角 固定副臂长度：9.5m/16m	●
腹置副臂	采用两节箱型腹置副臂，一节臂工作长度9.8m，两节臂全伸工作长度16m，安装角度5°、15°、30°。	○
臂端单滑轮	单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，起重性能与主臂相同，但最大起重量不超过4500kg。	●

产品各部件明细如上所述，具体部件明细请参照产品报价单

符号说明：

● —— 表示标准配置；

○ —— 表示选装配置。

技术规格

Technical specifications

	Chassis	
Frame	Designed and manufactured by XCMG, it is made of high strength steel with fully covered walking surface and anti-torsion box-typed structure.	●
Outriggers	Four outriggers arranged in H-shape are hydraulically controlled by control levers. There is an outrigger control station located at each side of the chassis, and there is a level gauge on each control station. The outrigger movements can be simultaneously or separately controlled at either side of the chassis. A fifth jack is available. Each jack cylinder is equipped with a double-way hydraulic valve. Outrigger float diameter: φ450 mm Reaction force of outrigger at max. lifting load: 504 KN	●
	Sinotruk Group, WD615.334, in-line, water-cooled, four-stroke, turbocharged intercooler, high pressure common rail engine, with rated power of 247 kW /2200 rpm and max. torque of 1350 Nm / 1100-1600 rpm, compliant with China III emission standard. Fuel tank capacity: 300L	●
	Dongfeng Cummins Engine Co., Ltd., QSL8.9-C325-30, in line, water cooled, four-stroke, turbocharged intercooler, high pressure common rail engine; with rated power of 242kW/2100rpm, and the max. torque of 1385Nm/1500rpm, compliant with Stage III emission standard. Fuel tank capacity: 300L	○ (Indian model)
Engine	WEICHAI Power, WP10H375E62, in-line, water-cooled, four-stroke, turbocharged intercooler, high pressure common rail engine, with rated power of 275kW/1900 rpm and max. torque of 1800Nm/(1000-1400)rpm, compliant with Europe VI emission standard. Fuel tank capacity: 300L	○ (Singapore model)
Engine	WEICHAI Power, WP9H336E62, in-line, water-cooled, four-stroke, turbocharged intercooler, high pressure common rail engine, with rated power of 247kW/1900 rpm and max. torque of 1600Nm/(1000-1400)rpm, compliant with BS-IV emission standard. Fuel tank capacity: 320L	○ (Indian model)
Transmission	Mechanical transmission, made by Shaanxi Fast Gear Co., Ltd., manual flexible shaft control, 9-forward speed and 1-reverse speed with a synchronizer.	●
	Mechanical transmission, made by Shaanxi Fast Gear Co., Ltd., manual flexible shaft control, 10-forward speed and 2-reverse speed with a synchronizer.	○ (Singapore model)
Axles	High strength axles, made by famous makers through adoption of foreign advanced technology, with reliable performance.	●
Suspensions	Rubber suspensions with V-type push rods are adopted for rear suspension system, leading to improved chassis stability and reduced tire wear.	●
Tires	315/80R22.5-22PR, tubeless tire, light weight, good heat dissipation, low noise, strong bearing capacity, long service life.	●
	12.00/R24, light weight, good heat dissipation, low noise, strong bearing capacity, long service life.	○ (Singapore model)
Brakes	Service brake: controlled by foot pedal, double-circuit air pressure brake. The first circuit acts on the wheels of axles 1 and 2, and the second circuit acts on the wheels of axles 3 and 4. Parking brake: spring-loaded brake, acting on the wheels of axles 2, 3 and 4. Auxiliary brake: engine compression brake, engine exhaust brake, safe and reliable, and will prolong the service life of brake lining.	●
Steering	Mechanically steering mechanism with a hydraulic booster.	●

技术规格

Technical specifications

Driver's cab	Luxurious driver's cab for right-hand drive, equipped with adjustable seats, simple sleeper, safety glass, electrically operated door window lifters, electric-adjustable mirrors, steering wheel adjustable in height and angle, liquid crystal display and radio, etc. Heater and air conditioner are standard.	●
Electrical system	DC 24 V, two sets of 12 V battery in series. Generator: 28±0.3V, 70 A(or 80A)	●
Safety devices	Double-way hydraulic valve	●
	Beacon lamp	○
	Yellow reflecting marking	○
	Backup camera	○
	ABS	○

	Superstructure	
Frame	Designed and manufactured by XCMG, made of high-strength steel	●
Hydraulic system	Load sensitive design of compensation at the rear of valve with special throttling device matched, more stable system minimum flow, more reasonable system rigidity, more prominent fine-control and smoothness; confluence technology for lifting, elevating and telescoping double-pump confluence; air-cooled hydraulic oil cooler is fitted. Oil tank capacity: 600 L	●
Operating mode	Mechanical control.	● Mechanical
	Pilot hydraulic proportional control through left and right levers is used for controlling the superstructure. Stepless speed regulation is available.	● Pilot
Main winch system	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, a balance valve and a grooved drum equipped. It has features of high speed with a light load and low speed with a heavy load.	●
Auxiliary winch system	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, a balance valve and a grooved drum equipped. It has features of high speed with a light load and low speed with a heavy load.	●
Slewing system	A single-row, four-point contact-ball slewing ring is driven by the planetary gear reducer of slewing mechanism, which is driven by a hydraulic motor, and may continuously slew 360° . Power control and free slewing function as well as stepless speed regulation are available.	●
Elevating system	A front support hydraulic cylinder is equipped for elevating operation, with a balance valve fitted.	●

技术规格

Technical specifications

Hook block	60t Hook block	●
	35t Hook block	○
	4.5t Hook block	●
Counter Weight	Total weight is 8t. Three counterweight configurations of 8t, 6.5t and 5.5t are available.	●
Operator's cab	New steel cab. Safety glass and sun shield are used for windows. A swing-out door is equipped. The cab features a new ergonomic seat design with backrest adjustment. Wipers are fitted for the windshield and roof window; standard controls and indicators are ergonomically arranged in the cab.	●
	Air conditioner is standard.	
	Extension of control lever	○
Safety devices	Hydraulic balance valve, hydraulic relief valve, LMI, spring centering system for control levers, lowering limiter for preventing wire rope from over-releasing, anti-two block at boom head for preventing wire rope from over-winding. Free sliding and slewing locking are also available.	●
	Winch monitoring device	○
	Tri colored light bar	○
	Slewing warning lamp	○
	Angle indicator	○
	Yellow reflective marking	○



Boom and jib system		
Boom	Comprised of one basic boom and four telescoping boom sections, the boom adopts anti-distortion design and is made of high strength structural steel. Double hydraulic cylinders plus wire ropes mechanism is used to telescope the boom. Main boom length: 11.5 m ~ 44 m	●
Swing-away jib	Two-section, lattice, welded structure; three offset angles of 0°, 15° and 30°. Fixed jib length: 9.5 m/16 m	●
Under slung jib	Two-section box-type under slung jib is available. One jib section is 9.8 m, the total length of two jib sections is 16 m. The jib has offset angles of 5°, 15° and 30°.	○
Single top	Fitted at boom head, used for single line operation. Its lifting performance is the same as that for boom, but the maximum lifting load does not exceed 4500kg.	●

Product parts list is as mentioned above. Please refer to the product quotation for specific parts.

Symbol explanation:

- —it means the standard configuration;
- —it means the optional configuration.

重量
Weight



车桥 Axle	1	2	3	4	总重量 Total weight
t	8	8	12.85	12.85	41.7



吊钩 Hook block	倍率 Parts of line	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
60t	13	517	1325×544×537	单钩 Single hook , 标配 Standard
35t	10	403	1334×544×419	单钩 Single hook , 选装 optional
4.5t	1	100(侧置副臂 Swing-away jib) /70(腹置副臂 Under slung jib)	536×298×298 /920×240×240	单钩 Single hook , 标配 Standard

作业速度
Working speeds



315/80R22.5	 km/h	
	2 ~ 90	38%



作业机构 Operating mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-128 m/min, 单绳, 第四层 m/min, single line, 4th layer	45 kN	18 mm/190 m
	0-128 m/min, 单绳, 第四层 m/min, single line, 4th layer	45 kN	18 mm/125 m
	0-2r/min		
	从-1°抬起至81°约40s Approx. 40 s for boom elevation from -1° to 81°		
	从11.45m伸出至44m约90s Approx. 90 s for boom extension from 11.45 m to 44 m		

臂架组合方案

Boom / Jib combinations



主臂

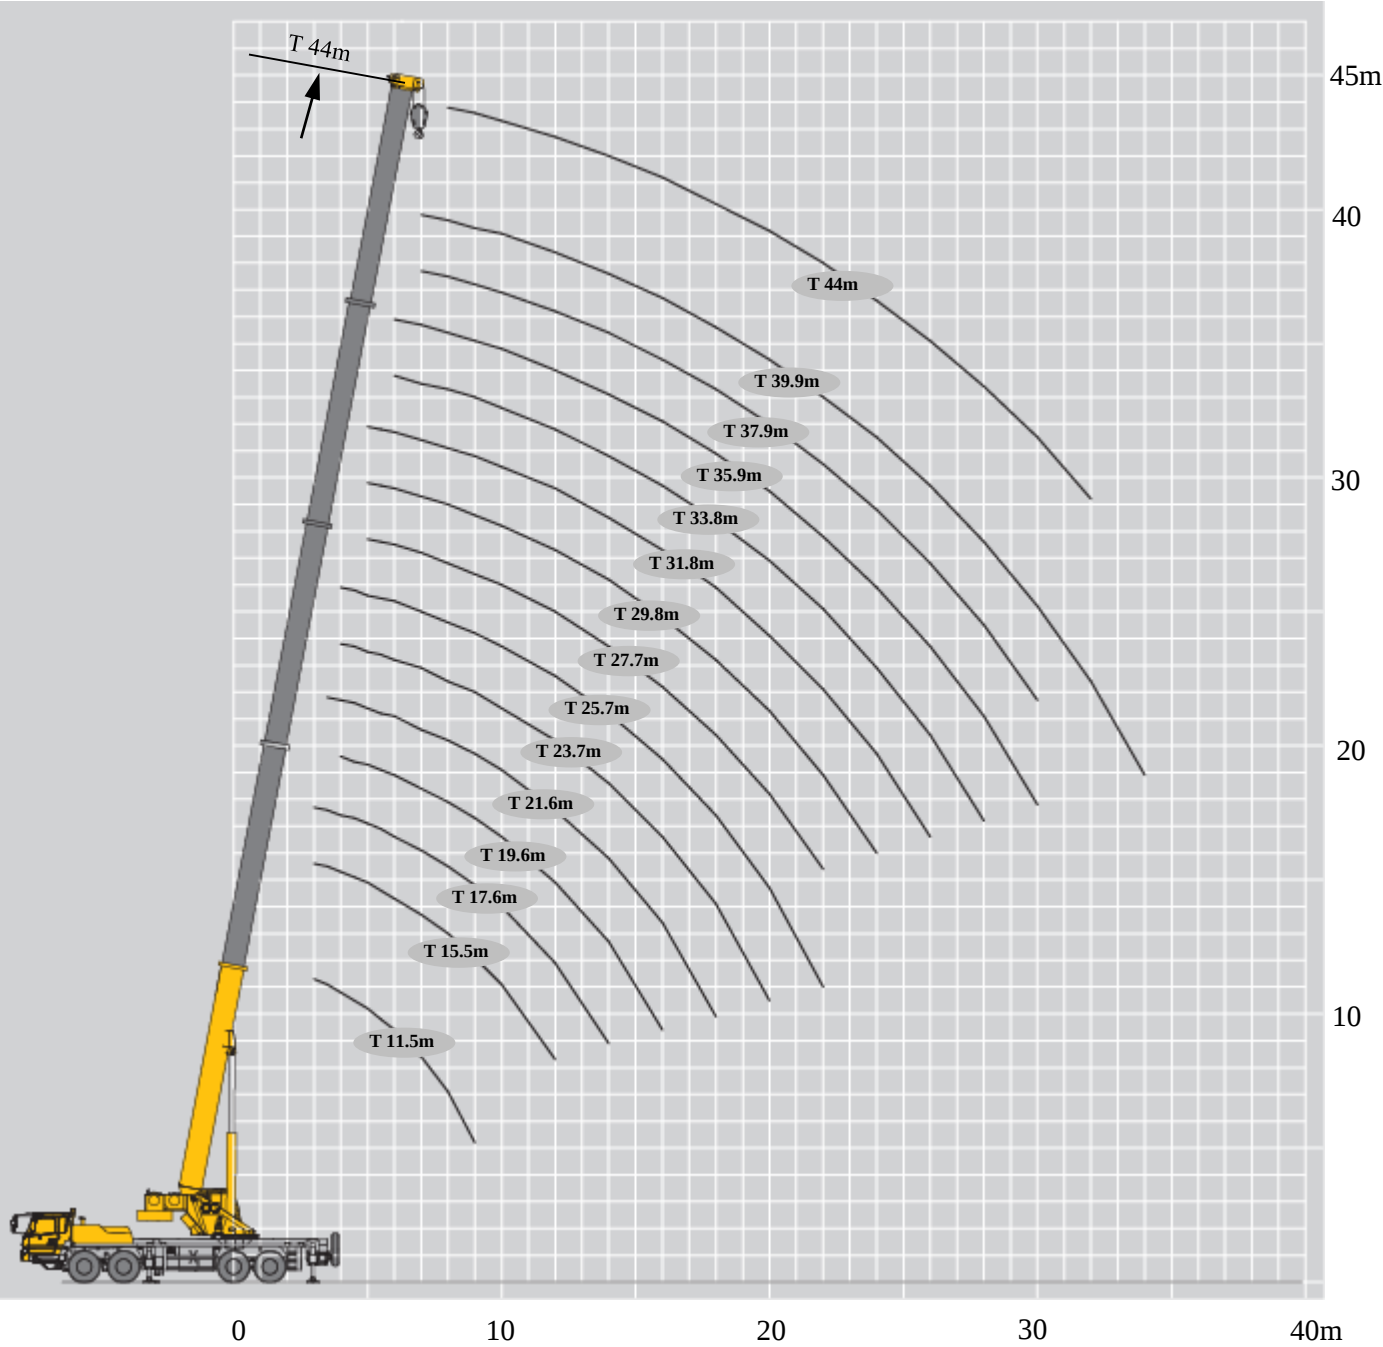
Telescopic boom




T: 11.5~44m

副臂

Jib

T: 44m
J: 9.5~16m (侧置副臂Swing-away jib)
J: 9.8~16m (腹置副臂Under slung jib)





								
m	11.5m	15.5m	19.6m	25.7m	31.8m	37.9m	44m	m
3	60000	45000						3
3.5	55000	45000						3.5
4	48000	45000	33300	25000				4
4.5	45000	43000	33000	25000				4.5
5	41000	40000	32000	25000	18500			5
5.5	36500	36000	29000	25000	18500			5.5
6	33000	32500	27000	23300	18500			6
7	27000	26600	24500	21000	18500	14000		7
8	22200	23000	22900	19000	17700	13200		8
9	17500	18500	18000	17000	16300	12500	9000	9
10		15900	15700	15800	15000	11800	9000	10
12		11000	10800	11200	11600	10300	8600	12
14			7700	8700	8700	9000	7900	14
16			5600	6600	7200	7600	7100	16
18				5100	5600	6000	6300	18
20				3900	4400	4800	5100	20
22				3000	3500	3900	4100	22
24					2800	3100	3400	24
26					2200	2500	2800	26
28						2000	2200	28
30						1600	1800	30
32							1400	32


起重性能表



Lifting capacities






T 17.6~39.9m

									
m	17.6m	23.7m	29.8m	35.9m	21.6m	27.7m	33.8m	39.9m	m
3	27000								3
3.5	27000				27000				3.5
4	27000	27000			27000				4
4.5	27000	27000			27000				4.5
5	27000	27000	17600		27000	24000			5
5.5	27000	26600	17200		27000	24000			5.5
6	27000	25600	16800	12000	27000	24000	16400		6
7	26000	23700	15300	11900	26000	24000	15300	11000	7
8	25000	22200	14200	11200	24400	23100	14300	10600	8
9	21400	20800	13000	10400	20800	21500	13400	10100	9
10	17700	18400	12000	9700	17200	17900	12500	9500	10
12	12700	13400	10400	8600	12200	12900	11000	8600	12
14	9500	10200	9100	7600	9100	9700	9700	7800	14
16		8000	8300	6600	6900	7500	7900	7000	16
18		6400	6700	6000	5400	5900	6300	6300	18
20		5200	5500	5700		4800	5100	5400	20
22			4600	4800		3800	4200	4400	22
24			3800	4000			3400	3700	24
26				3400			2800	3000	26
28				2800			2300	2500	28
30				2400				2100	30
32								1700	32
34								1400	34

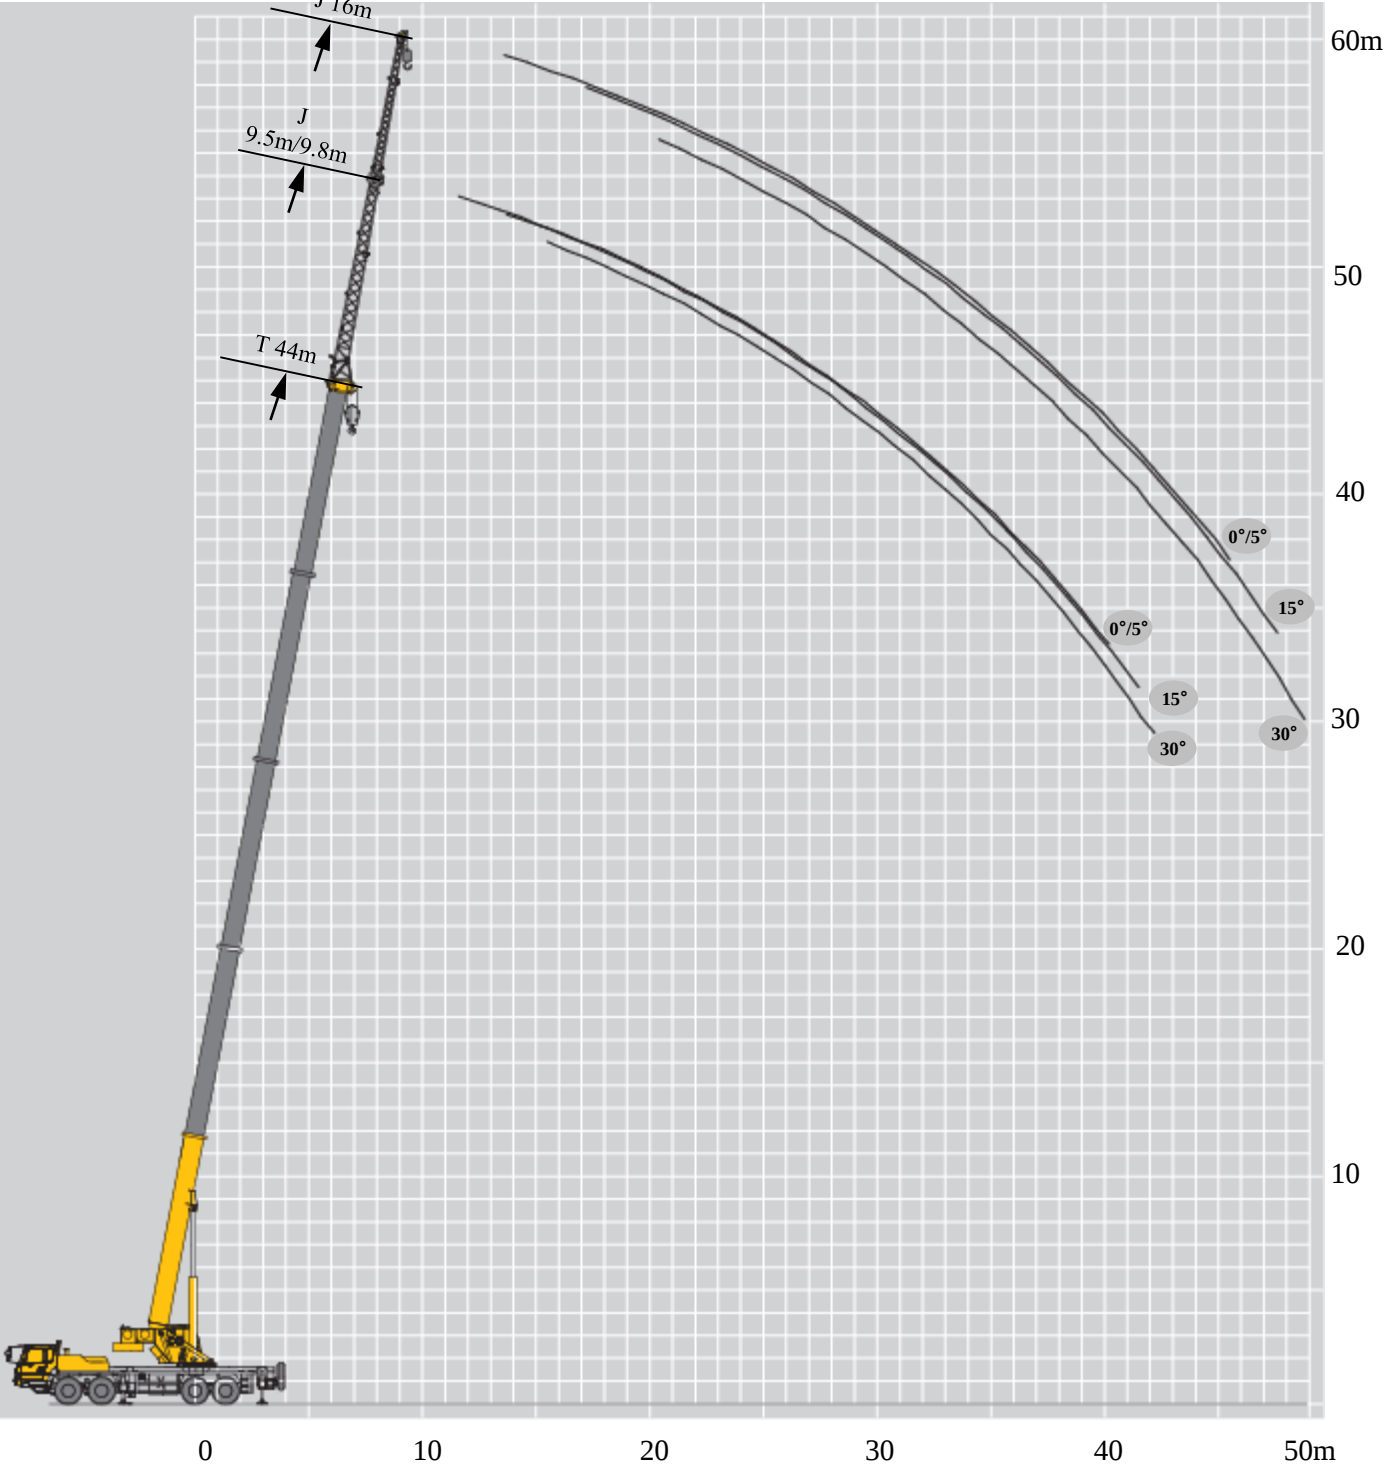起升高度曲线图
Lifting heights



  				
	0° /5° (腹置副臂Under lung jib)	15°	30°	
78	4500	3000	2500	78
75	4100	2800	2400	75
72	3800	2600	2300	72
70	3500	2500	2200	70
65	2800	2300	2000	65
60	1900	1700	1700	60
55	1200	1100	1100	55
50	700	700	700	50

  				
	0° /5° (腹置副臂Under lung jib)	15°	30°	
78	2800	1500	1200	78
75	2400	1400	1100	75
72	2000	1200	1000	72
70	1900	1200	950	70
65	1700	1000	850	65
60	1200	900	750	60
55	850	700	650	55
50	450	400	300	50

符号标识

Description of symbols

常规标识

General symbols

	上车 Superstructure		底盘 Chassis
	起重能力 Lifting capacity		车桥 Axle
	吊臂长度 Boom length		行驶速度 Travel speed
	工作幅度 Working radius		爬坡能力 Grade ability
	吊臂仰角 Boom angle		轮胎 Tires
	主臂起升高度 Hoist height with boom		支腿 Outriggers
	固定副臂长度 Fixed jib length		吊钩 Hook block
	副臂安装角 Jib offset angle		平衡重 Counterweight
	副臂起升高度 Hoist height with jib		卷扬 Winch
	使用第五支腿360°全回转 360° operation of boom with the 5th jack down		360°全回转 360° operation of boom

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by percentage (or digits, which means the percentage of boom sections extended).

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item	单位 Unit	参数 Parameter			
尺寸参数 Dimensions	外形尺寸 (长×宽×高) Dimensions (length×width×height)	mm	14095×2790×3615/3685(侧置副臂 Swing-away jib) 14650×2790×4050/4120(腹置副臂 Under slung jib)			
	轴距 Wheel base	mm	1470/4300/1350			
	轮距 (前/后) Track (Front/ Rear)	mm	2304/2081			
	前悬/后悬 Front/ Rear overhang	mm	2376/2404			
	前伸/后伸 Front/ Rear extension	mm	2195/0(侧置副臂 Swing-away jib) 2750/0(腹置副臂 Under slung jib)			
重量参数 Weight	最大允许总质量 Max. permissible total weight	kg	41700			
	轴荷 Axle load	一轴 1st axle	kg	8000		
		二轴 2nd axle	kg	8000		
		三轴 3rd axle	kg	12850		
		四轴 4rd axle	kg	12850		
动力参数 Power	发动机型号 Engine model	——	WD615.334	QSL8.9-C325-30	WP10H375E62	WP9H336E62
	额定功率/转速 Engine rated power/rpm	kW/(r/min)	247/2200	242/2100	275/1900	247/1900
	最大净功率/转速 Max. net power/rpm	kW/(r/min)	245/2200	——	——	242/1900
	最大输出扭矩/转速 Max. output torque/rpm	N.m/(r/min)	1350/(1100~1600)	1385/1500	1800/(1000~1400)	1600/1000-1400
行驶参数 Travel	最高车速 Max. travel speed	km/h	90	50	60	48
	最低稳定车速 Min. stable travel speed	km/h	2~3			
	最小转弯直径 Min. turning diameter	m	≤24			
	臂头最小转弯直径 Min. turning diameter at boom tip	m	≤29.56(侧置副臂 Swing-away jib)			
			≤30.34(腹置副臂 Under slung jib)			
	最小离地间隙 Min. ground clearance	mm	260/330 (12.00/R24)			
	接近角 Approach angle	°	19/25 (12.00/R24)			
	离去角 Departure angle	°	13/15 (12.00/R24)			
	制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h)	m	≤10			
	最大爬坡能力 Max. grade ability	%	≥38/≥45 (潍柴 Weichai)			
	百公里油耗 Fuel consumption per 100 km	L	40			
噪音 Noise	加速行驶机外噪声 Exterior noise level when accelerating	dB(A)	≤84			
	驾驶员耳旁噪声 Noise level at seated position	dB(A)	≤90			

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item			单位 Unit	参数 Parameter
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity			t	60
	最小额定工作幅度 Min. rated working radius			m	3
	转台尾部回转半径 Turning radius at turntable tail			mm	3900
	最大起重力矩 Max. load moment	基本臂 Base boom		kN.m	2009
		最长主臂 Fully-extended boom		kN.m	1113
		最长主臂+副臂 Fully-extended boom + Jib		kN.m	703
	支腿跨距 Outrigger span	纵向 Longitudinal		m	6.1
		横向 Lateral		m	7.1
	起升高度 Hoist height	基本臂 Base boom		m	11.3
		最长主臂 Fully-extended boom		m	43.6
		最长主臂+副臂 Fully-extended boom + Jib		m	59.8
	起重臂长度 Boom length	基本臂 Base boom		m	11.5
		最长主臂 Fully-extended boom		m	44
		最长主臂+副臂 Fully-extended boom + Jib		m	60
	副臂安装角 Jib offset angle			°	0, 15, 30(侧置副臂 Swing-away jib) 5, 15, 30(腹置副臂 Under slung jib)
工作速度参数 Working speed	起重臂起臂时间 Time for raising the boom			s	≤40
	起重臂全伸时间 Time for fully extending the boom			s	≤90
	最大回转速度 Max. slewing speed			r/min	≥2
	支腿收放时间 Time for extending and retracting the outrigger	水平支腿 Outrigger beam	收 Retracting	s	≤35
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤35
			放 Extending	s	≤40
	起升速度（单绳,第四层,空载） Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch		m/min	≥128
		副起升机构 Auxiliary winch		m/min	≥128
噪声 Noise	机外辐射 Exterior noise level			dB (A)	≤122
	司机位置处 Noise level at seated position			dB (A)	≤90



地址: 江苏省徐州市经济技术开发区高新路68号

Add: No. 68, Gaoxin Road, Economic Development
Zone, Xuzhou, Jiangsu Province, China

电话(Tel): +86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel): +86-516-87888268

备件电话(Spare Parts Tel): +86-516-83461542

邮编(Post Code): 221004

网址(Web): www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.